



## Why US?

#### **OUR GROUP OF COMPANIES**

has been in tiles business since last 21 years and successfully gain the trust of every customer and dealers. The quality of our product makes it more durable than any other. Our authenticity, curiosity and our incredible empathy are the main pillars behind our great relationship with our customers.

Our company has been believing in the principle of making lives better. Whether it is your living spaces or offices or some places like malls, restaurants, hotels that sees high footfalls, our products are an exceptional choice for everywhere you like.

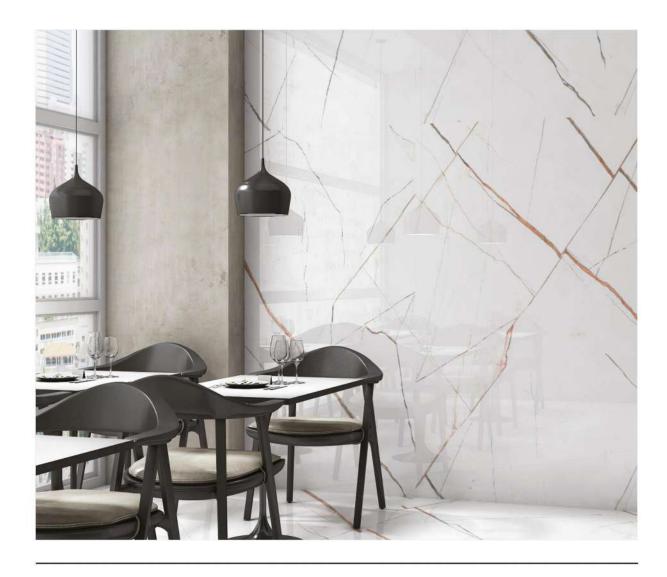

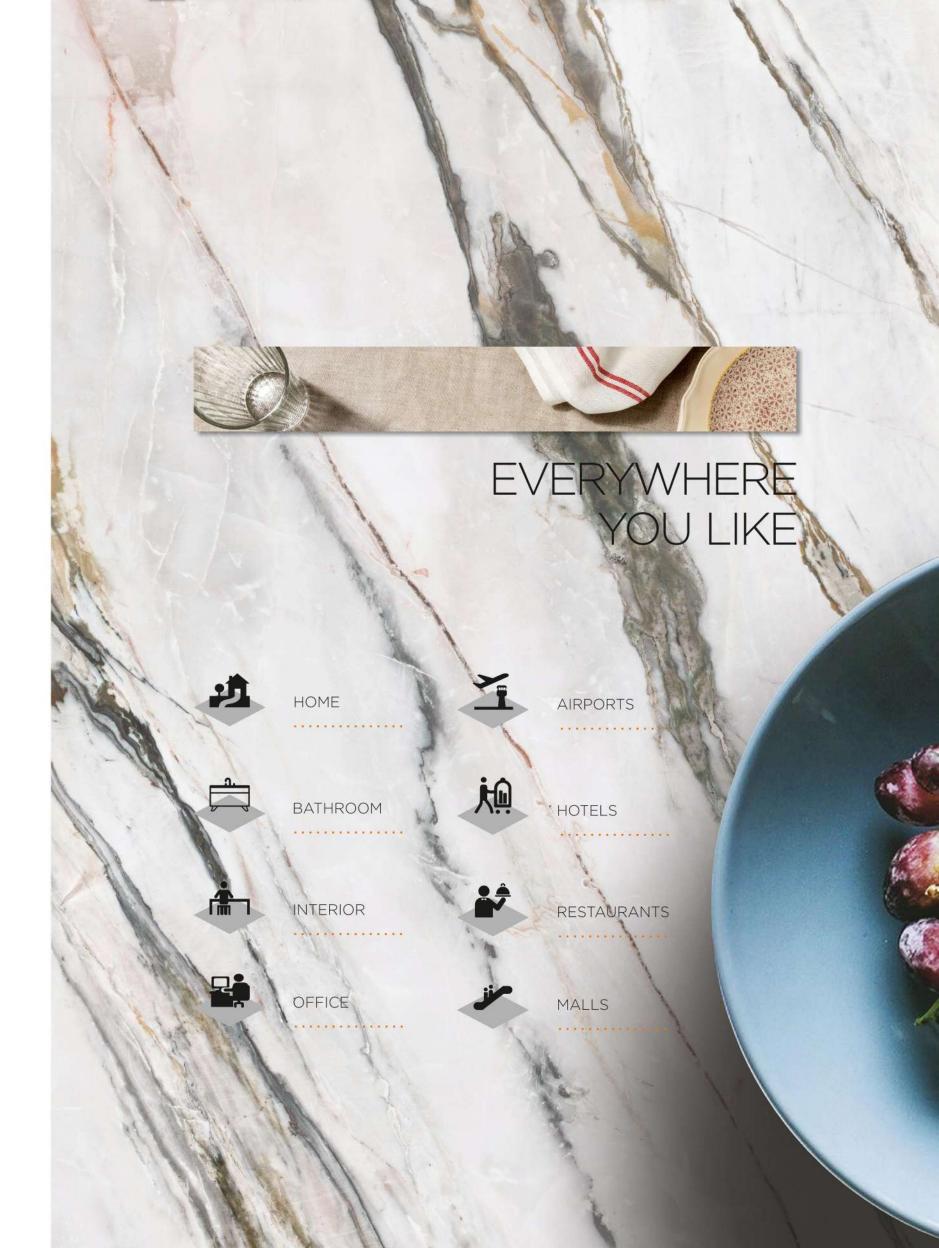

## Why Marbletouch?

#### THE DURABILITY OF MARBLETOUCH SLABS

makes them perfect for high-traffic areas as they're resistant to scratches and scuffs. Whether in an area of the home that sees high footfall, such as the hallway or kitchen or in a commercial space, porcelain is the most hardwearing.

The refined, exquisite spirit of Marbletouch slabs finds an intriguing new timeless collection of fine floors and coverings. The Marbletouch collection presents a unique and evolution of luxury for modern settings with unique allure. New structures and fine materials join forces to give the space a glamorous, contemporary look.





### **Features**



QUALITY RAW MATERIALS



NO ALTERATION IN COLOR



VERSATILE FOR ANY PROJECT



RESISTANT TO HEAVY LOADS



NON-ABSORBENT



EASY TO CLEAN



RESISTANT TO LIQUIDS AND ACIDS



RESISTANT TO SCRATCHES AND ABRASIONS



RESISTANT TO THERMAL SHOCK



RESISTANT TO FROST



NON-TOXIC SLABS
THAT DO NOT RELEASE
MICRO-PARTICLES




SURFACE SUITABLE FOR CONTACT WITH FOODSTUFFS




HYGIENIC SURFACE



## Available Series













GLOSSY MARBLE

\_

В

HIGHGLOSS MARBLE

C

MATT MARBLE

D

CARVING MARBLE

\_

SUPER WHITE MARBLE







#### ALASKA WHITE

Finish | High Gloss Random | 3 Faces



#### AVOCADO BRONZE







# **DESIGN ANY PIECE**OF FURNITURE

1 ALASKA WHITE




1 ALASKA WHITE





← 800X1600MM




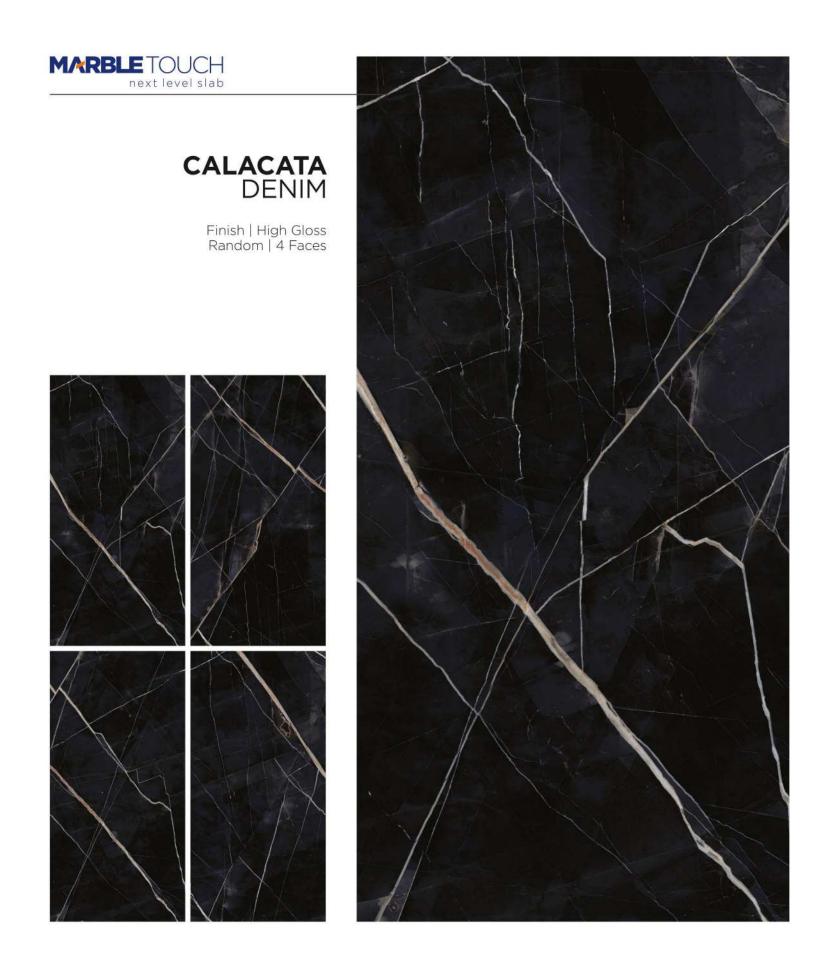



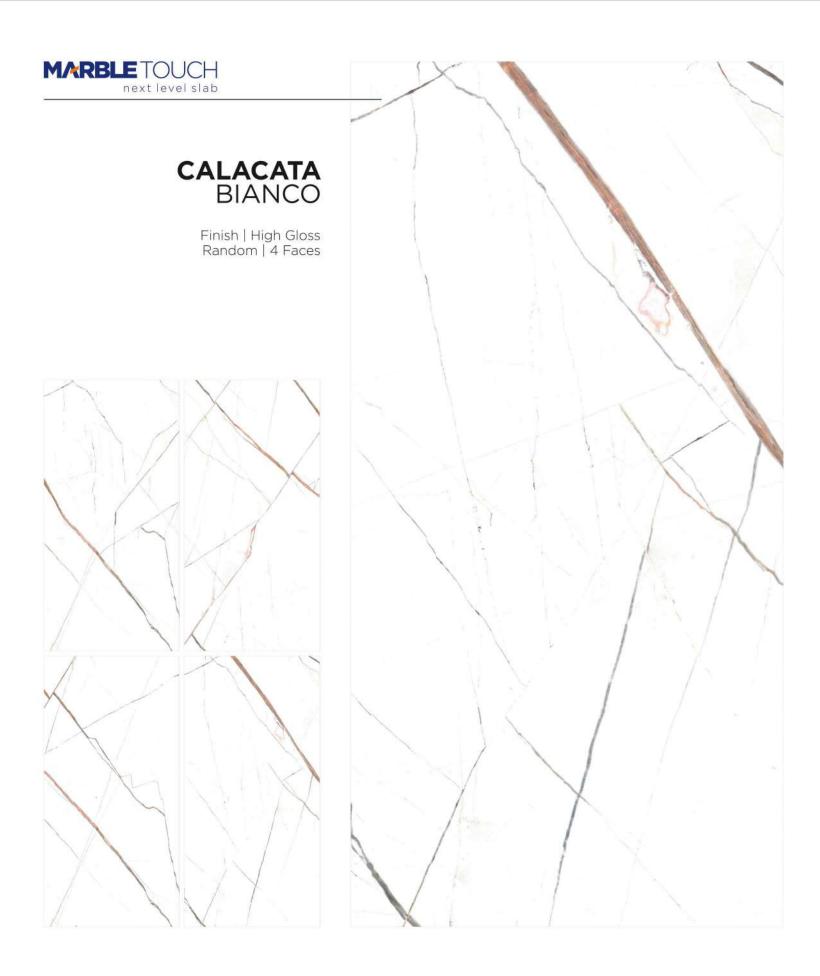


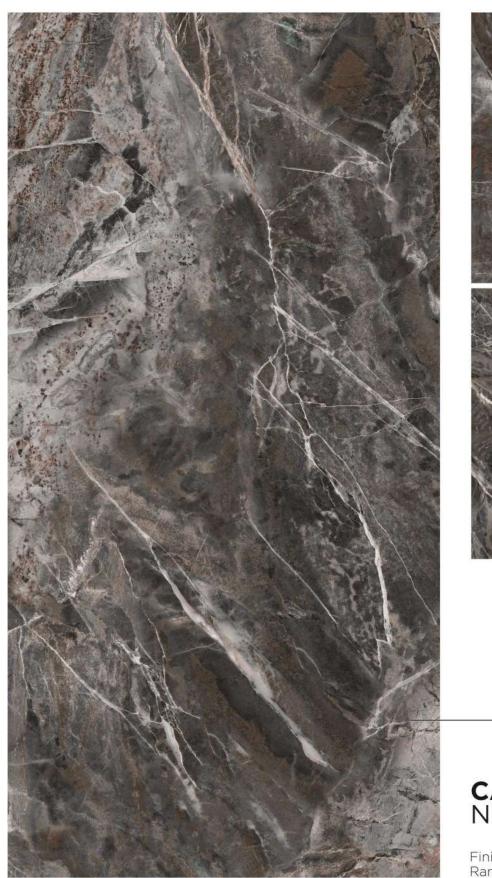

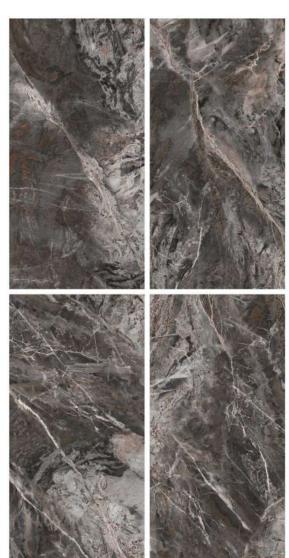




## **CAMELOT** NEON

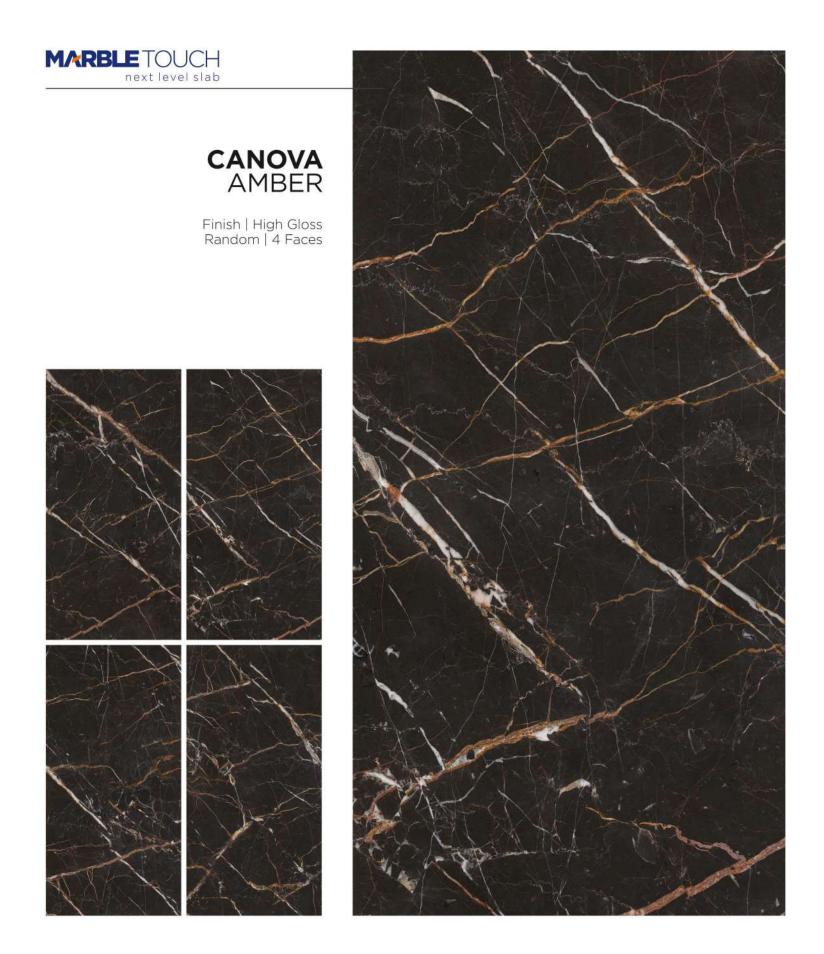



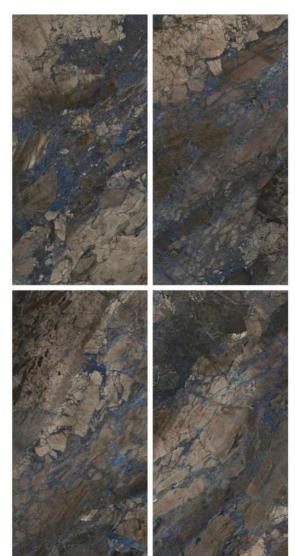




#### **DRAGO** BLUE





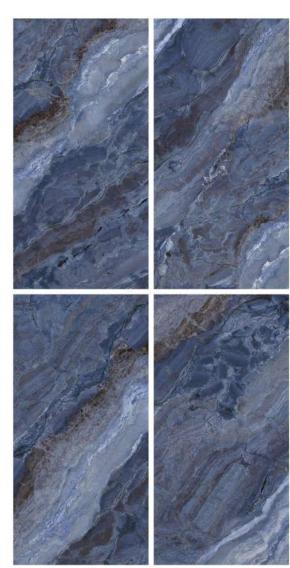




#### **EAGLE** BLUE

Finish | High Gloss Random | 4 Faces



#### **EAGLE** BROWN

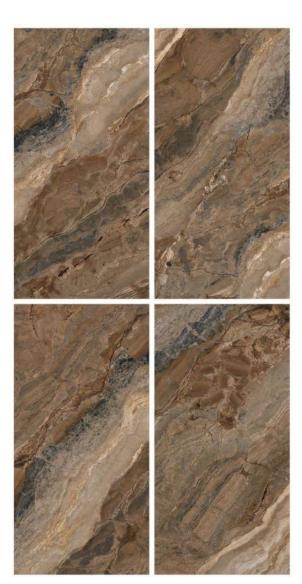










#### **GLAMOUR** AZUL

Finish | High Gloss Random | 4 Faces



#### GLAMOUR GOLD



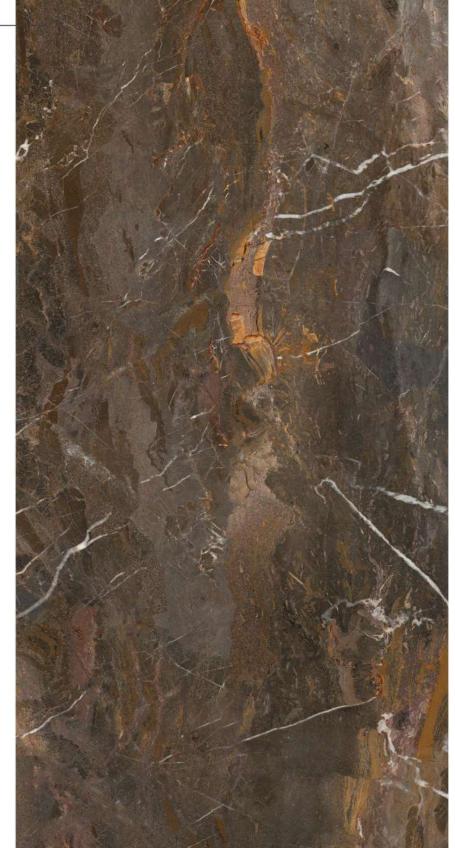








#### **GREEK** NEGRO






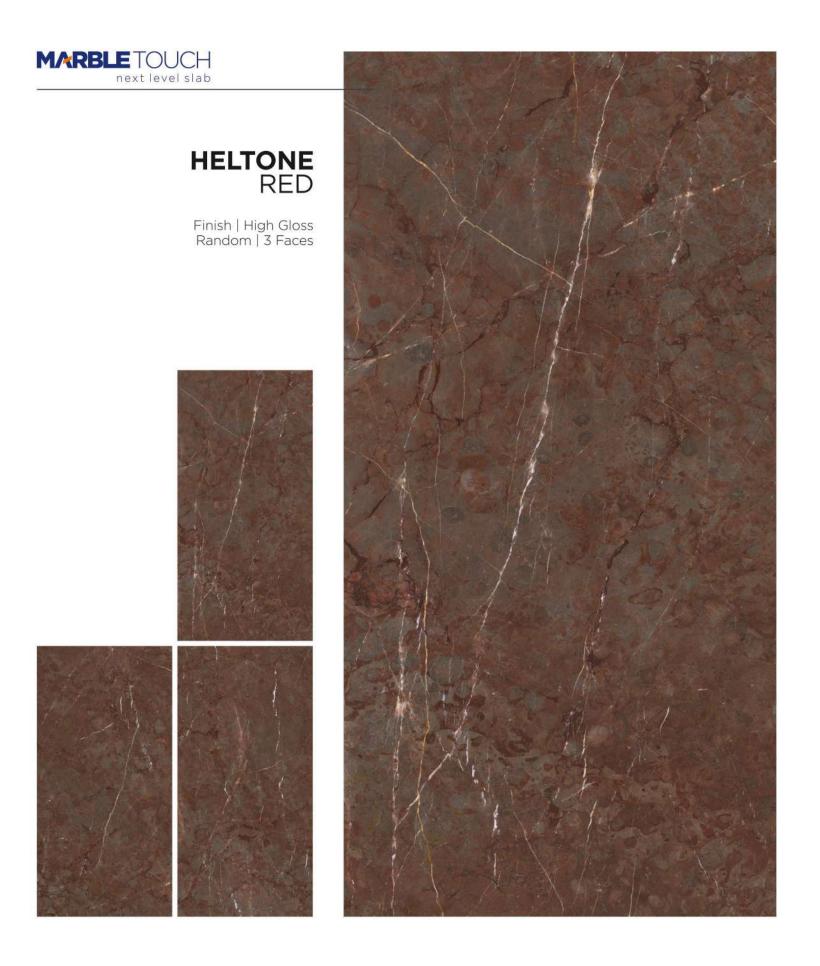







#### ONYX BLUE

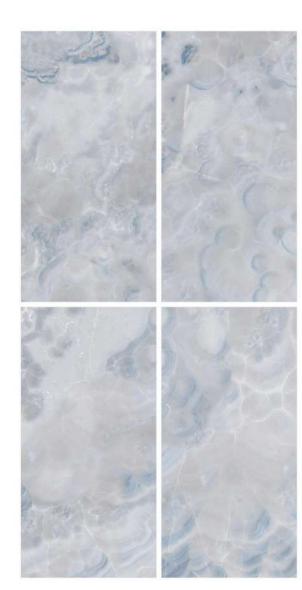






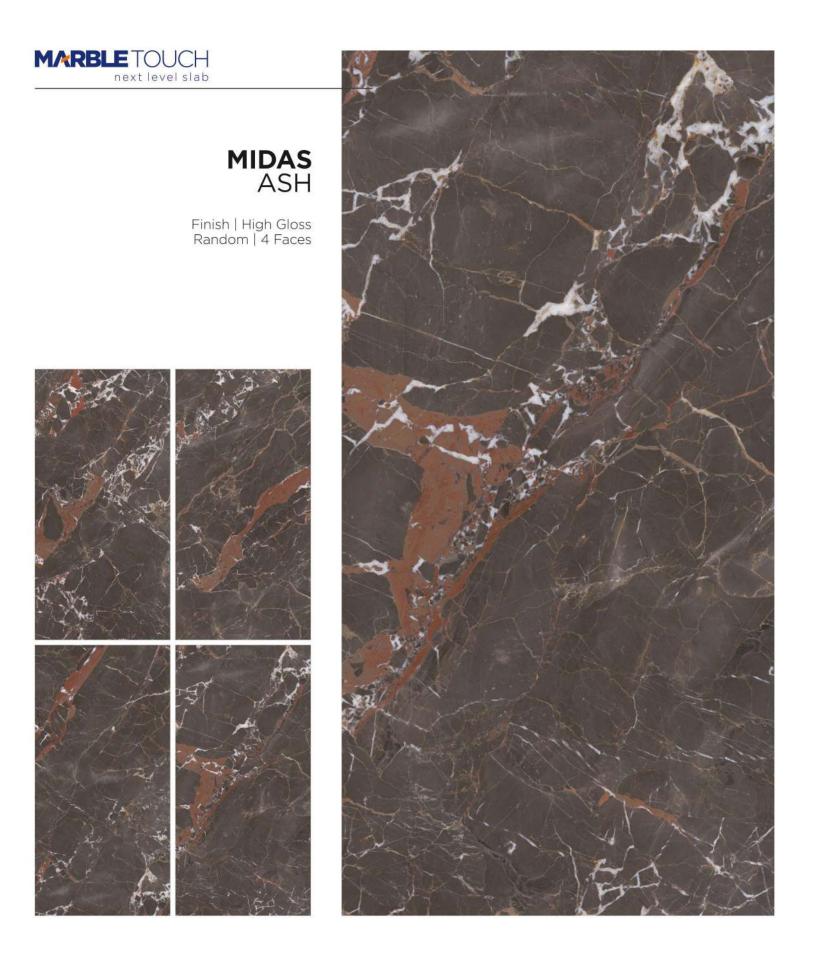

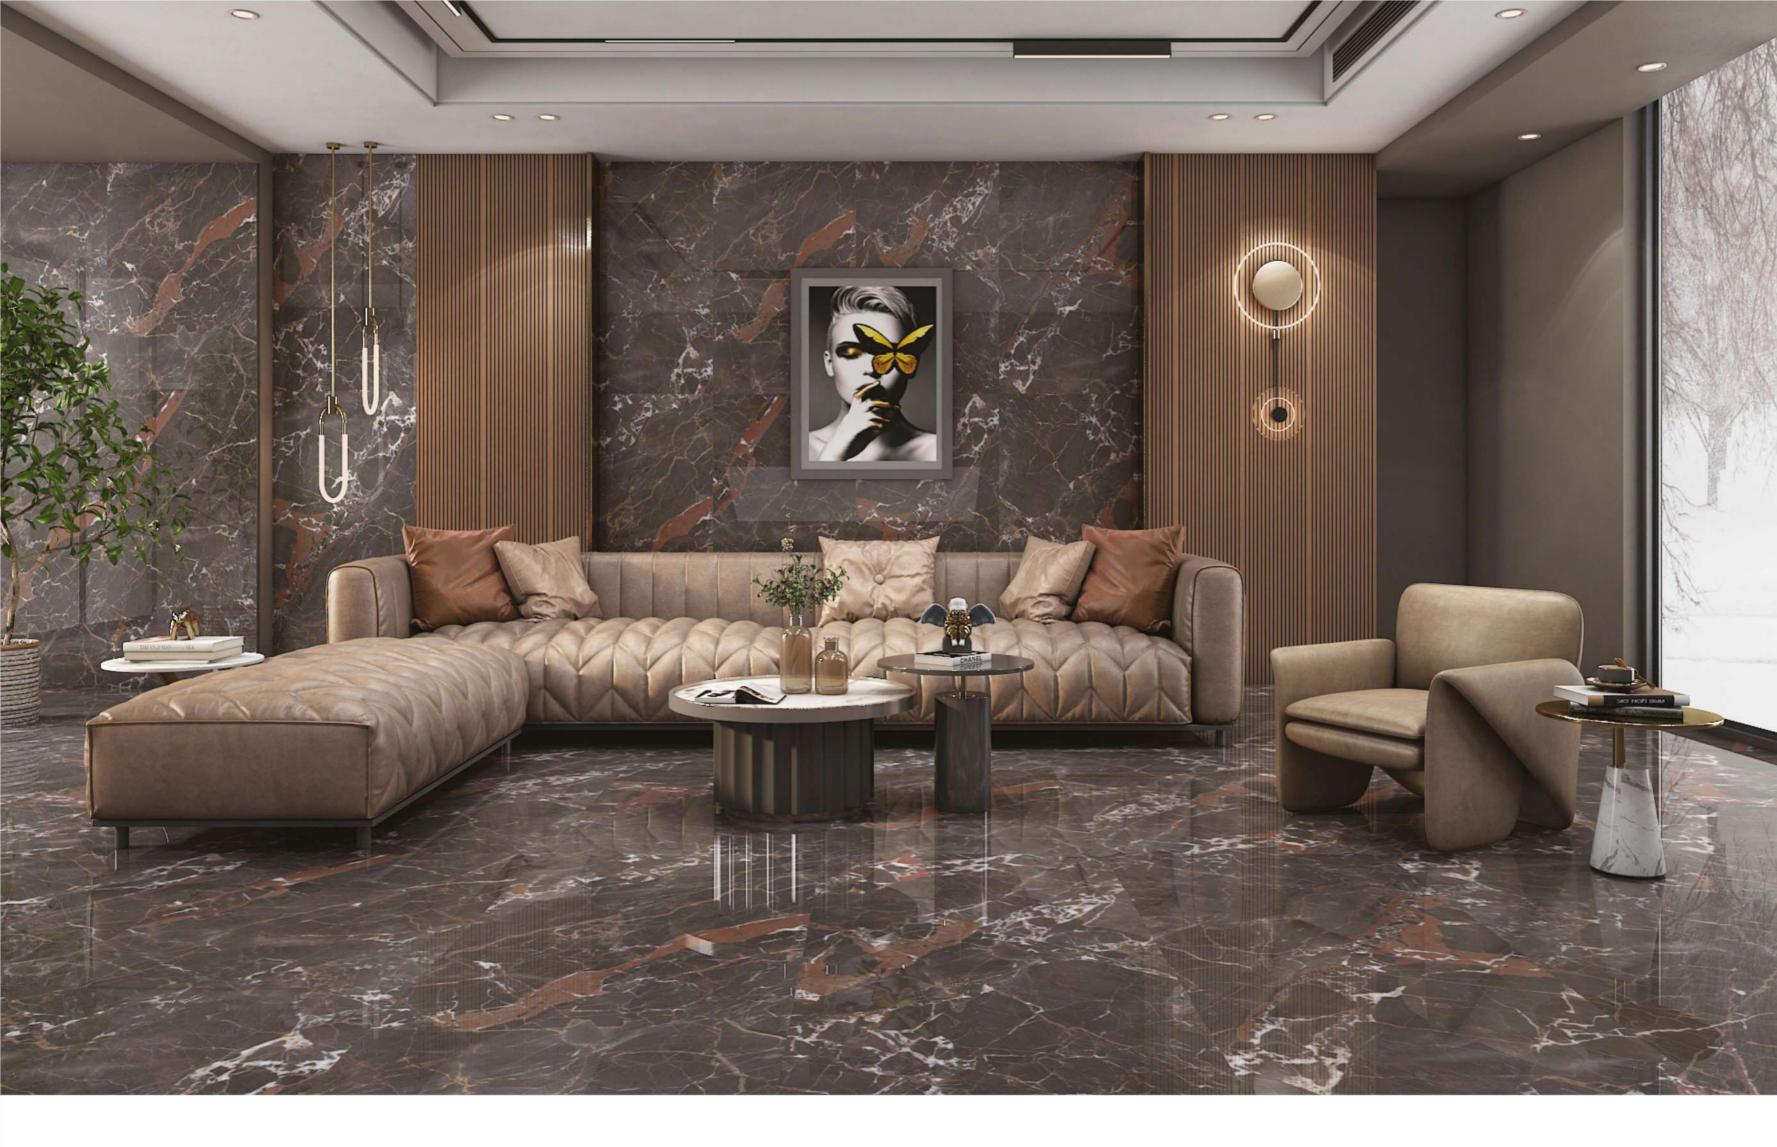

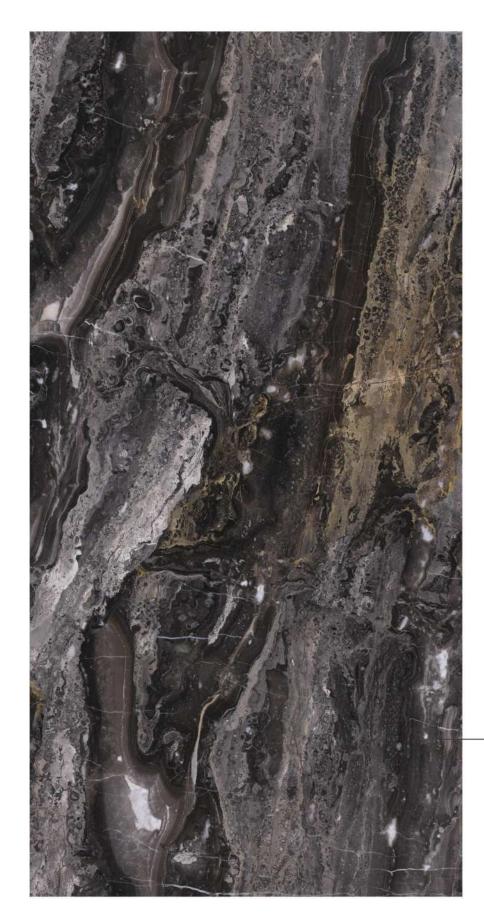





#### **OROBICO** NEGRO

Finish | High Gloss Random | 4 Faces




#### PATAGONIA MINK














**PETRACIA** NEGRO

Finish | High Gloss Random | 3 Faces



#### PETRACIA SILVER













#### PRISM ONYX





① PROGETTI BROZE






SILVER TRAVERTINE NERO





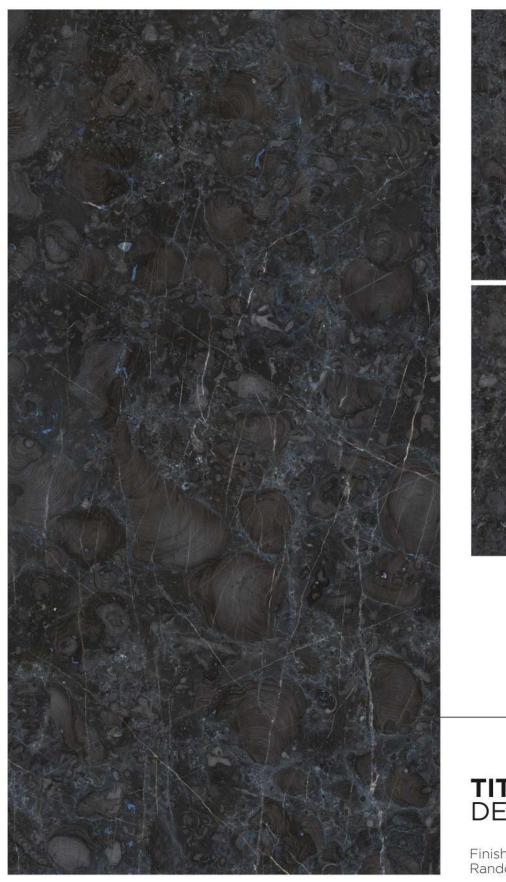





#### TITANIO DENIM

Finish | High Gloss Random | 4 Faces



#### TITANIO GOLD











#### **VALCANO** BIANCO



#### **TECHNICAL SPECIFICATION**

CHARACTERISTIC	STANDARD AS PER IS0-13006/EN14411 GROUP Bla	OUR VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES		100 00 00 00 00 00 00 00 00 00 00 00 00	
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROF	PERTIES	185	
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES		
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PRO	OPERTIES		
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off	As per mfg	Does not yield	ISO-10545-15
by glazed tiles		Pb & Cd	

#### **PACKING DETAILS**

Size	Tiles / Box	Coverage Area / Box	Coverage Area / Box
80X160CM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.